

Top ECO60 W COVERSHEET

Planned document changes:

Briefly:

2024-09-12. Remove comment from POS.8.

Document changes:

Date:	Change:	Rev. after change:
2024-02-08	Power plug added. Lubrication corrected.	A
2023-05-11	New document.	-


Readers note:

 Indicates instruction.

 Represents Hose.

Dashed lines for overview, mounts
on other pages/assemblies.

S60
DC3

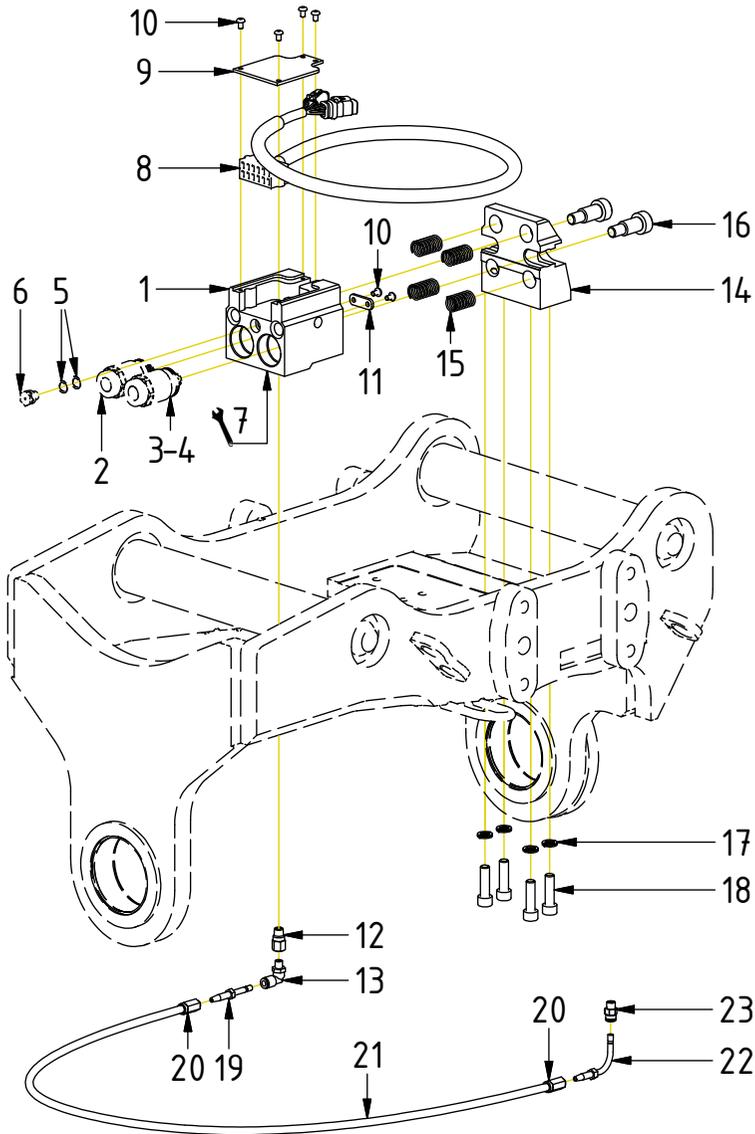

POS	DESCRIPTION	PART	QTY	COMMENTS
1	Block ECO60W Top 2hy.1cl. Complete	1074025	1	(POS.2, 5-6 incl.)
2	Coupling ECO60 1/2" male V2	1027633	2	Torque: 60Nm. (POS.3-4 incl.)
3	Backup-ring SKF-19-024-395A PU	710996	2	
4	O-ring 28.3x1.78 NBR/70	710980	2	
5	Washer Copper 14x10	6000065	2	
6	Button head fitting 1/8" stainless	810505	1	Loxeal 58-12. Torque: 30Nm
7	Adapters according to Top part			See "Top part"
8	Power plug ECO60 W Top (4S, 6S)	8002114	1	Cable gland torque: 6Nm
9	Coverplate ECO60 W Top	1041140	1	
10	Screw K6S M5x8 10.9 FZB	611801	6	
11	Cable clamp	1074897	1	
12	Extender M8x1-M8x1 18mm	7000688	1	Loxeal 58-12
13	Push-in swivel 90° M8x1	790173	1	Loxeal 58-12
14	Attachment block ECO60 W Top	1042255	1	
15	Spring 18x35	1024794	4	
16	Shoulder bolt \varnothing 16x25/M12	611709	2	
17	Washer NL 10mm	611041	4	
18	Screw MC6S M10x35 12.9	610494	4	
19	Pipe stub straight Push-in	790175	1	
20	Screw socket HT-hose \varnothing 8,6mm	7000585	2	
21	Grease hose bulk 100m	7001303	1	EC319: 1125mm
22	Pipe stub 90° Push-in	7000318	1	
23	Push-in coupling R1/8"	790172	1	Loxeal 58-12
24	Transport Protection ECO-Block	1033412	1	Part of make up

POS in order of assembly

