

EC206 - CW10EC

COVERSHEET




Planned document changes:

Breifly: _____
No planned changes.


Document changes:

Date:	Change:	Rev. after change:
2023-04-12	Photos updated.	B
2020-01-17	Coversheet added.	A

EC206 - CW10EC

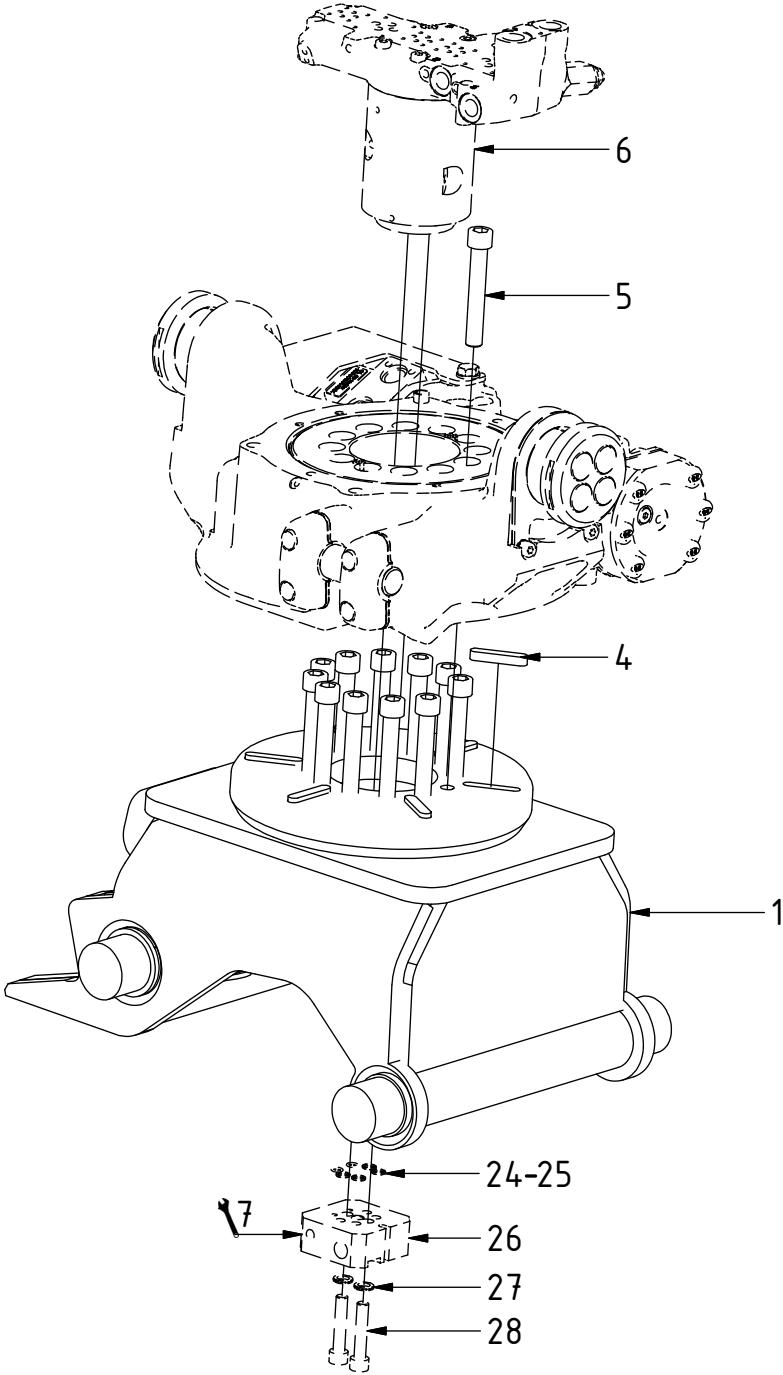

POS	DESCRIPTION	PART	QTY	COMMENTS
1	Quick hitch CW10EC EC206	1031427	1	
2	Quick hitch CW10EC 0° EC206	1036145	1	
3	Quick hitch CW10EC 11° EC206	1034862	1	
4	Feather Key	650102	6	
5	Socket Head Screw 14x90	610510	12	Torque: 217Nm
6	Valve block & swivel complete	1026703	1	(POS.24-28 included) Part of control system See "Valve blocks & swivels"
7	See p.3 connection block config.			
23	Dust protection	790120	2	
24	O-ring 6,1x1,6	710954	2	
25	O-ring 9,25x1,78	710901	4	
26	Connection Block EC206	1016582	1	
27	Washer NL10	611041	2	
28	Socket Head Screw 10x50	610457	2	

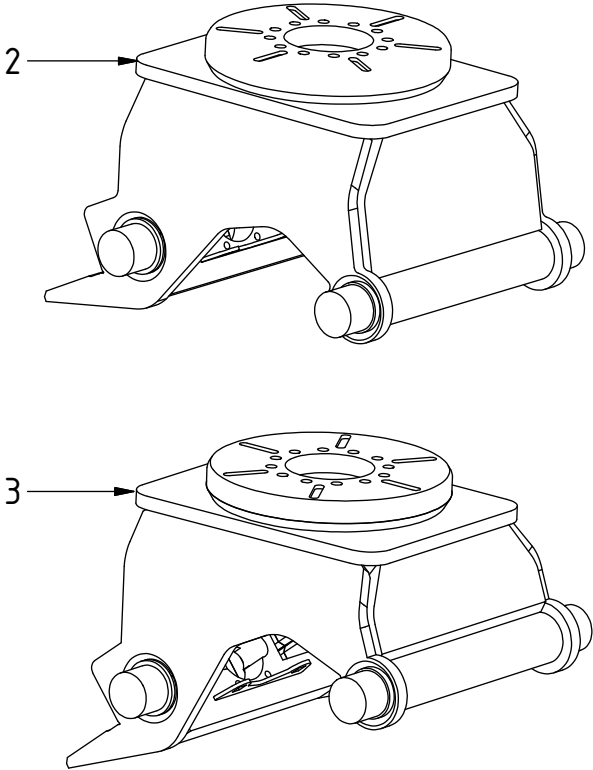


Dashed lines for overview, mounts on other pages/assemblies. indicates instruction. represents hose.

EC206 - CW10EC

POS	DESCRIPTION	PART	QTY	COMMENTS
8	Disassemble connection block from swivel			
9	Plug Bsp 1/8"	711503	2	
10	Sealing washer 1/8"	710701	2	
11	Adapter 90° 1/8" male - Adj. male	710293	2	
12	Washer GBR06 3/8	710703	4	
13	Adapter 90° 3/8"	710152	2	
14	Washer GBR04 1/4	710702	4	
15	Plug 1/4"	711505	2	
16	Reassemble connection block to swivel			
17	Hose Lock	7000259	2	


POS in order of assembly

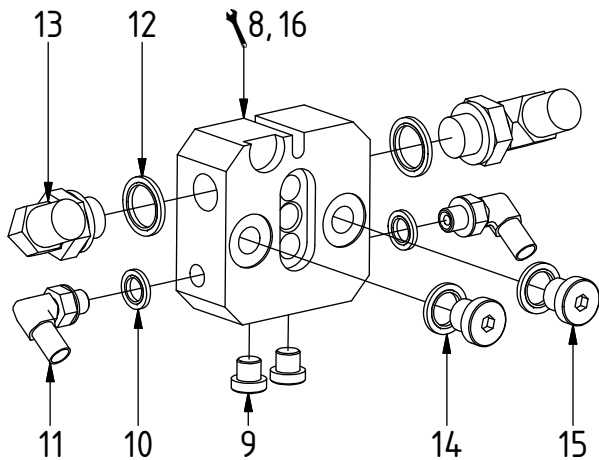

EC206 - CW10EC


POS	DESCRIPTION	PART	QTY	COMMENTS
11	Adapter 90° 1/8" male - Adj. male	710293	2	
12	Washer GBR06 3/8	710703	4	
13	Adapter 90° 3/8"	710152	2	
17	Hose Lock	7000259	2	
18	Adapter 1/8" - 1/4" male - male	710103	2	
19	Hose Extra	7000260	2	
20	Bulkhead adapter nut Bsp 3/8"	710252	2	
21	Bulkhead adapter Bsp 3/8"	710242	2	
22	Quick coupling 3/8"	790113	2	
23	Dust protection	790120	2	

Lock:
Close

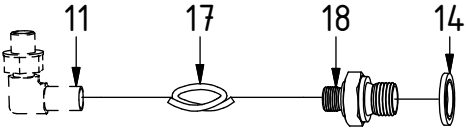


C



Lock:
Open

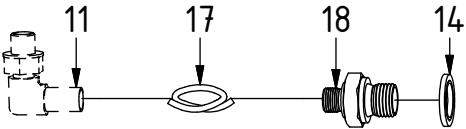

O

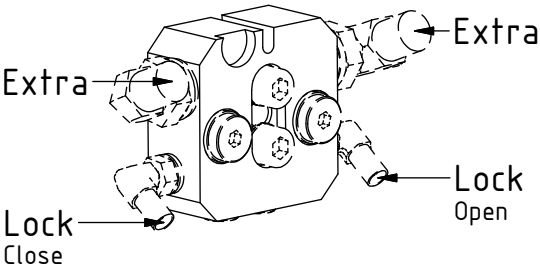

Extra:
Standard

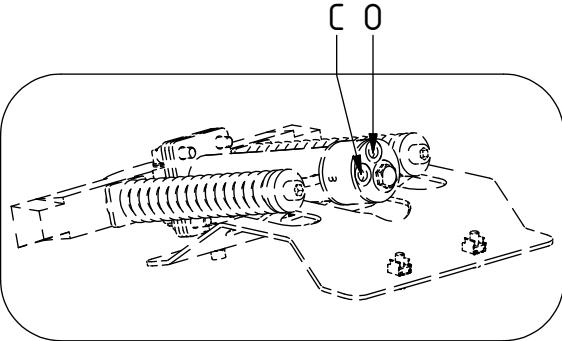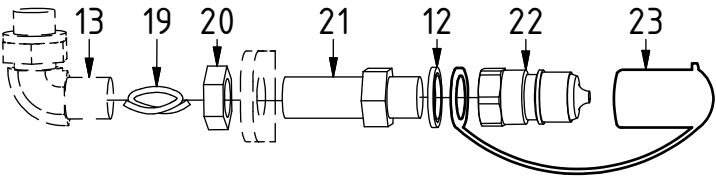

See instruction,
Standard components

EC206 - CW10EC

POS	DESCRIPTION	PART	QTY	COMMENTS
17	Hose Lock	7000259	2	
19	Hose Extra	7000260	2	

POS in order of assembly

