

EC226 - S70 ECHF

COVERSHEET



Planned document changes:


Briefly:

Plug POS.7 when used on the side of connection block:
Replaced by plug 7001657 used with 3/8" Tredo.
(Not replaced when used under connection block, plugging "Extra")

Document changes:

Date:	Change:	Rev. after change:
2018-06-18	Layout/irrelevant.	B
2018-01-23	Extra updated with hoses. Coversheet added.	A

EC226 - S70 ECHF

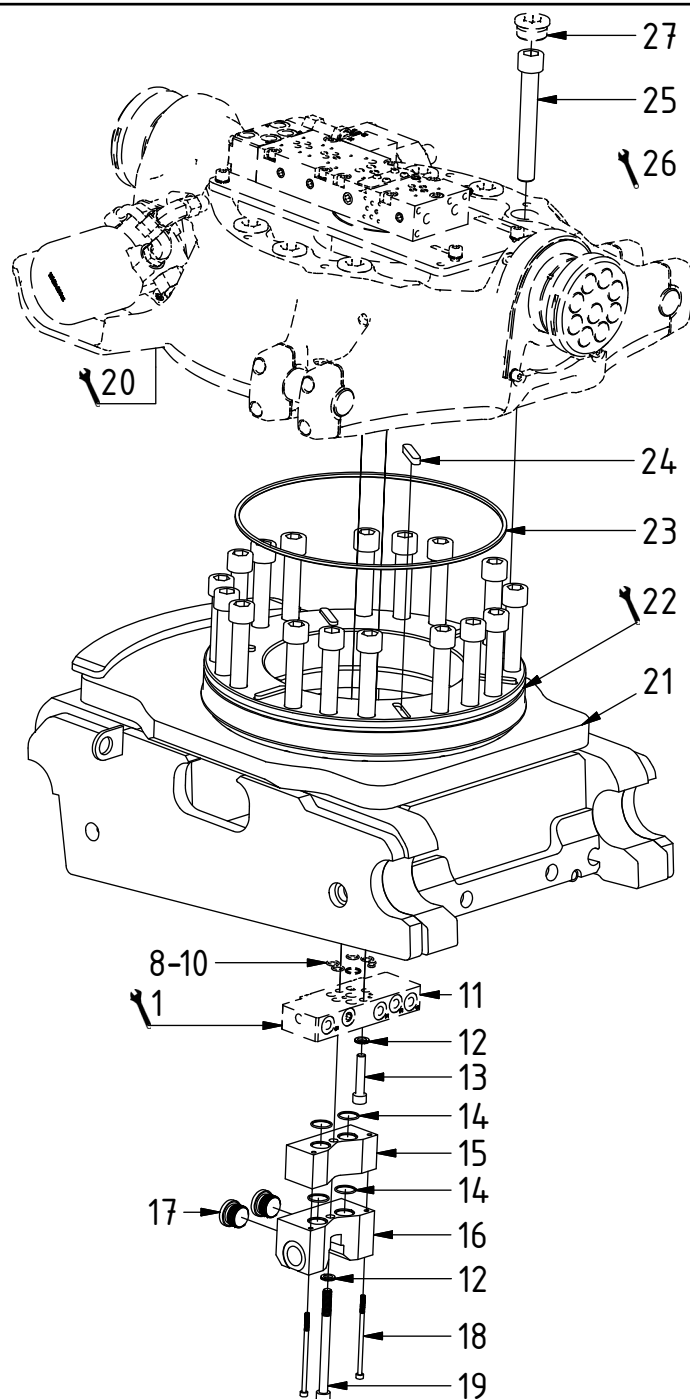


POS	DESCRIPTION	PART	QTY	COMMENTS
1	See p.3 connection block config.			
8	O-ring 6,07x1,78	712422	2	Part of rotator frame assembly
9	O-ring 15,6x1,78	710912	1	Part of rotator frame assembly
10	O-ring 12,42x1,78	710973	4	Part of rotator frame assembly
11	Connection block ECHF	1028391	1	Part of rotator frame assembly
12	Washer NL10	611041	2	
13	Screw MC6S 10x50	610457	1	
14	O-ring 20,35x1,78	710974	4	
15	Shim block 43mm ECHF	1034578	1	
16	Extra block 3/4" ECHF	1031934	1	
17	Plug 3/4"	711532	2	
18	Screw MC6S 5x100	6000049	2	
19	Screw MC6S 10x130	6000050	1	
20	Assemble break support			See separate instruction
21	Quick hitch EC226 S70 ECHF	1035841	1	
22	Grease the ring			
23	O-ring 319,3x5,7	710908	1	
24	Feather Key	650102	6	
25	Screw MC6S 20x140	610561	18	Torque: 649Nm
26	Torque tighten quick hitch to rotator frame, six holes. Rotate to access the remaining holes			
27	Pipe plug M36	650408	6	Part of rotator frame assembly

POS in order of assembly

Standard:

POS	DESCRIPTION	PART	QTY	COMMENTS
2	Sealing washer 1/4"	710702	10	
3	Plug 1/4"	711505	2	
4	Bulkhead adapter extended 1/4"	710261	3	
5	Adapter 1/4"	710135	1	
6	Plug Bsp 1/2"	711500	1	
7	Plug 3/8"	711504	4	

POS in order of assembly

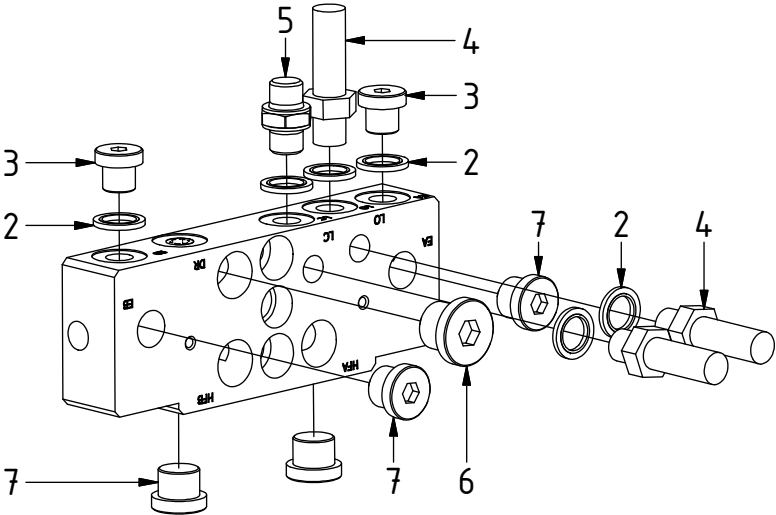


EC226 - S70 ECHF

POS	DESCRIPTION	PART	QTY	COMMENTS
2	Sealing washer 1/4"	710702	10	
4	Bulkhead adapter extended 1/4"	710261	3	
5	Adapter 1/4"	710135	1	
28	Sealing washer 3/4"	710706	4	
29	Hose Extra	7000569	2	
30	Quick coupling 3/4"	790193	2	
31	Dust protection 3/4"	790195	2	
32	Hose Kit	740244	1	(POS.33 included)
33	Hose Lock	740238	4	
34	Bulkhead adapter 1/4"	710240	4	

Lock:


C_{close(1)}

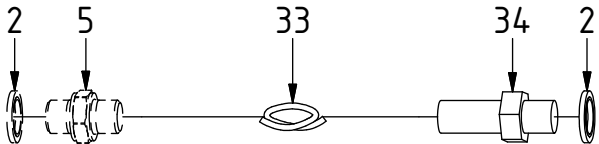

Lock:




O_{open(1,2)}

C_{close(2)}

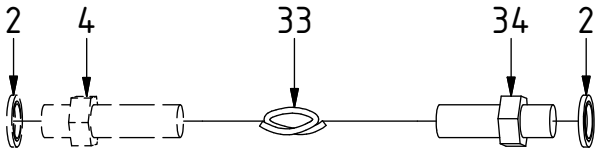

Extra:

Standard

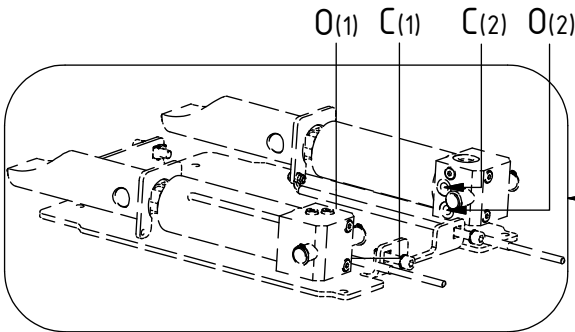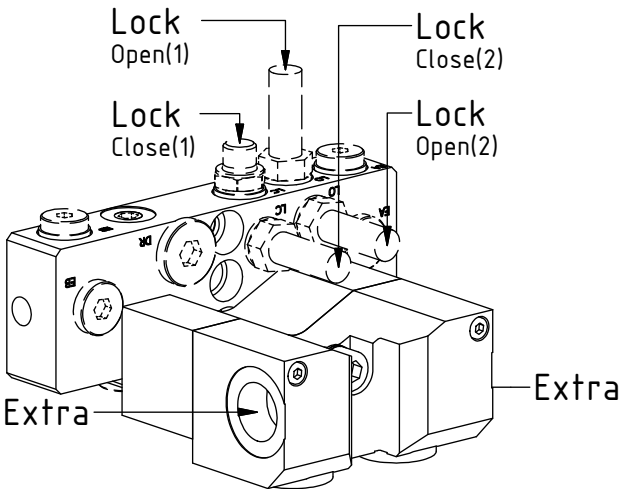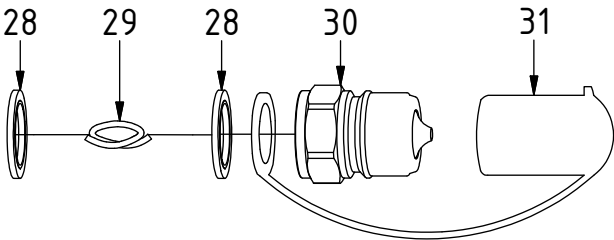

See instruction,
Standard components

EC226 - S70 ECHF

POS	DESCRIPTION	PART	QTY	COMMENTS
29	Hose Extra	7000569	2	
32	Hose Kit	740244	1	(POS.33 included)
33	Hose Lock	740238	4	

POS in order of assembly

